GOLDWELD
Exothermic Welding

CR33

Cable to Ground Rod

Horizontal cable cross to ground rod

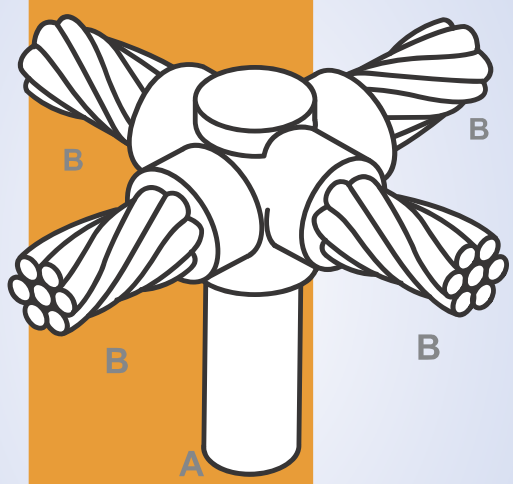

Khuôn hàn hóa nhiệt Goldweld CR33

Khuôn hàn 4 Ngã dây 1 ngã cọc

Rod Size		Conductor Size	Metal Powder (g)	Graphite Mould Type	Handle Clamp Type
A mm	A inch	B mm²			
14.2	5/8	10	65	CR33-E-1610	HCC
16		16	90	CR33-E-1616	HCC
		25	90	CR33-E-1625	HCC
		35	115	CR33-E-1635	HCC
		50	150	CR33-E-1650	HCC
		70	150	CR33-E-1670	HCC
		95	150	CR33-E-1695	HCC
		120	200	CR33-E-16120	HCC
		150	250	CR33-E-16150	HCC
		185	150x2	CR33-D-16185	HCD
		240	200x2	CR33-D-16240	HCD
17.2	3/4	10	90	CR33-E-1810	HCC
18		16	90	CR33-E-1816	HCC
		25	115	CR33-E-1825	HCC
		35	115	CR33-E-1835	HCC
		50	150	CR33-E-1850	HCC
		70	150	CR33-E-1870	HCC
		95	200	CR33-E-1895	HCC
		120	250	CR33-E-18120	HCC
		150	150x2	CR33-E-18150	HCC
		185	150x2	CR33-D-18185	HCD
		240	200x2	CR33-D-18240	HCD
		300	250x2	CR33-D-18300	HCD

Tools Request :

Hotline: 0869 278 279 - LeKhangCorp.com